

FORM PTO-1399 (Modified)  
(REV 10/95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S SOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

RCA88670

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/445131

INTERNATIONAL APPLICATION NO.  
PCT/US98/12502INTERNATIONAL FILING DATE  
16 June 1998PRIORITY DATE CLAIMED  
16 June 1997

TITLE OF INVENTION

## IDENTIFICATION OF PROGRAM INFORMATION ON A RECORDING MEDIUM

APPLICANT(S) FOR DO/EO/US

Jianlei Xie

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

## Items 13 to 18 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98. *w/ two (2) refs*
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.  
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☒ Certificate of Mailing by Express Mail
19. ☒ Other items or information: *Return Receipt Postcard*

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/445131

INTERNATIONAL APPLICATION NO.

PCT/US98/12502

ATTORNEY'S DOCKET NUMBER

RCA88670

20. The following fees are submitted.

**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :**

- ☒ Search Report has been prepared by the EPO or JPO ..... **\$840.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) ..... **\$670.00**
- ☐ No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... **\$760.00**
- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... **\$970.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) ..... **\$96.00**

**ENTER APPROPRIATE BASIC FEE AMOUNT =****\$840.00**

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	23 - 20 =	3	x \$18.00
Independent claims	8 - 3 =	5	x \$78.00

**\$54.00****\$390.00**Multiple Dependent Claims (check if applicable). ☐**\$0.00****TOTAL OF ABOVE CALCULATIONS =****\$1,284.00**

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

**\$0.00****SUBTOTAL =****\$1,284.00**

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

**\$0.00****TOTAL NATIONAL FEE =****\$1,284.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐

**\$0.00****TOTAL FEES ENCLOSED =****\$1,284.00**

Amount to be:  
refunded \$  
charged \$

☐ A check in the amount of \_\_\_\_\_ to cover the above fees is enclosed.

☒ Please charge my Deposit Account No. **07-0832** in the amount of **\$1,284.00** to cover the above fees.  
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **07-0832** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

Joseph S. Tripoli - Patent Operations  
Thomson multimedia Licensing Inc.  
PO Box 5312, 2 Independence Way  
Princeton, NJ 08543-5312

SIGNATURE

Frank Y. Liao

NAME

40065

REGISTRATION NUMBER

DATE

12/31/99

14:21W 9-33065

DOCUMENT PROCESSING BRANCH

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION</b> <b>(37 CFR 1.63)</b>	<b>Attorney Docket Number</b>	RCA88670
	<b>First Named Inventor</b>	Jianlei Xie
	<b>COMPLETE IF KNOWN</b>	
	<b>Application Number</b>	09/445,131
	<b>Filing Date</b>	December 3, 1999
<input type="checkbox"/> Declaration Submitted with Initial Filing	<b>Group Art Unit</b>	
	<b>Examiner Name</b>	
<input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)		

As a below named inventor, I hereby declare

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

IDENTIFICATION OF PROGRAM INFORMATION ON A RECORDING MEDIUM

the specification of which (Title of the Invention)

☐ is attached hereto

OR

☒ was filed on (MM/DD/YYYY)

12/03/1999

as United States Application Number or PCT International

Application Number 09/445,131 and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
60/049,653	06/16/1997	

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U. S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/US98/12502	06/16/1998	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number  
OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer  
Number Bar Code  
Label here

Name	Registration Number	Name	Registration Number
TRIPOLI, Joseph S.	26,040		
SHEDD, Robert D.	36,269		
LIAO, Frank Y.	40,065		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.


Direct all correspondence to:

☐ Customer Number or  
Bar Code Label

OR ☒ Correspondence address below

Name	JOSEPH S. TRIPOLI - PATENT OPERATIONS				
Address	PO BOX 5312 - 2 INDEPENDENCE WAY				
Address					
City	PRINCETON	State	NJ	ZIP	08543-5312
Country	USA	Telephone	609-734-9400	Fax	609-734-9700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:	<input type="checkbox"/> A petition has been filed for this unsigned inventor						
Given Name (first and middle (if any))			Family Name or Surname				
Jianlei			Xie				
Inventor's Signature					Date	02/28/00	
Residence: City	Carmel	State	IN	Country	USA	Citizenship	USA
Post Office Address	11852 Stoney Bay Circle,						
Post Office Address							
City	Carmel	State	IN	ZIP	46033	Country	USA

☐ Additional inventors are being named on the \_\_\_\_\_ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

09/445131

11/PRTS

1

418 Rec'd PCT/PTO 03 DEC 1999

IDENTIFICATION OF PROGRAM INFORMATION ON ARECORDING MEDIUM

## FIELD OF INVENTION

5 This invention generally relates to the field of encoding information on a recording medium, and more particularly to a system and method of identifying a disk with any format, including, for example, either a single-sided or a double-sided format with either a single-layer or multiple-layer tracks.

10

## BACKGROUND OF INVENTION

Laser disks such as CD ROMs have become the preferred recording medium for audio music and/or computer program distribution. More recently, Digital Video/Versatile Disks (DVD)

15 have been introduced that are predicted to become the preferred choice for recording everything from full-length motion pictures to computer games.

One advantage of a DVD over CD ROM is DVD's superior data storage capacity. The current industry-wide DVD

20 Specifications for Read-Only Disk (published by and obtainable from Toshiba Corporation of Tokyo, Japan; here in after referred to as "DVD Specifications") support at least the following formats (listed with the corresponding storage capacities for a 12 cm DVD ROM disk):

25	<u>Format</u>	<u>Capacity</u>
	Single sided	4.7 GBytes
	Double sided	9.4 GBytes
	Single sided, dual layered	8.54 GBytes
	Double sided, dual layered	17 Gbytes

30

009000 "TEL 544500

From the above, it is clear that the storage capacities of DVD disks improve dramatically over the storage capacity of .65 GByte available on the current CD-ROM. In addition, other optical disks with more than 4 layers of tracks are also being produced.

A laser or an optical disk such as a DVD disk is made up of a reflective metal foil layer such as aluminum encased in a clear substrate. Data are stored on the foil as a series of tiny pits formed in a continuous tight spiral on the disk. The pits are formed in the foil by first stamping a disk made of polycarbonate, acrylic, polyolefine or similar material, using a master stamper in a pressing or injection molding process. The surface of the injection molded disk is then metalized with, for example, aluminum metal in a sputtering process to form the metal foil containing the pits. The pits provide the necessary reflective surface so that a laser beam from a DVD player may be reflected to indicate the data pattern on the disc.

As mentioned above, there are at least 4 different formats currently contemplated for DVD. In the case of a single-sided DVD, the stamped disk is joined to a dummy substrate. For a double-sided disk, two halves, each with a respective metal foil layer containing data, are bonded back to back.

In addition, as defined by the DVD Specifications, two layers of data are possible on each side of a disk. A single-layer disk has only one track per side on a disk, whereas a dual-layer disk has two tracks per side of a disk. A dual-layer disk has both a Layer 0 track closer to the reading surface, and a Layer 1 track, away from the reading surface, as shown, for example, in Fig. 1A. Typically, a dual-focus optical system is employed so that the data on either Layer 0 or Layer 1 on a

dual-layer disk can be read. Layer 0 is purposely made partially transparent so that a laser in the optical system can focus on Layer 1 through Layer 0.

Fig. 1B shows the disk structure of a known double-sided, dual-layer disk. The exemplary disk has a total of 4 reflective layers (two on each side of the disk). To read a dual-sided disk, a user either manually flips over the disk or the DVD player use a motor mechanism to automatically flip the disk or the laser.

Since all the laser disks from a single manufacturing run are stamped from the same stamping master, their contents are identical to each other and to the stamping master. It has been recognized that it may be desirable to be able to put certain data (e.g., serial number or encryption key, etc.) unique to each disk or program on the disk so that the disk or the program contained within can be identified. This would allow, for example, a company to be able to offer pay-per-view capability, to prevent piracy, or to remotely activate a computer program.

For example, to offer a pay-per-view service using a DVD disk, a company may decide to give out DVD disks containing a movie program at very low cost and then to charge viewers based on the number of times the movie is played. This pay-per-view application can be accomplished, for example, by having an individualized serial number associated with each individual disk or program being distributed. A DVD player can be built that can interrogate and retrieve this serial number, if the disk is played by the player. This serial number can then be transmitted to the program provider's billing center via a built-in modem, for example, in the DVD player, so that a charge can be billed to the household where the DVD player resides.

10

15

20

25

30

A laser system capable of encoding individualized information on a disk conforming to the BCA requirement of the



DVD Specifications is described, for example, in an article entitled "BCA Recording Technology for Adding Individual Information on DVD ROM Disk", published in National Technical Report of Japan, Vol. 43, No. 3, dated June, 1997. The system  
5 employs a CW-Q switch type YGA laser with wavelength of 1.06 um to encode data in a BCA area.

Similarly, D1, EP 0 802 527 A1, discloses an optical disk having a first recording area and a BCA area encoded with identification data. The data in the BCA is used to decipher data recorded on the first  
10 encoding area. Nowhere in D1, however, suggests that the optical disk may have different sides or layers or that more than one BCA area may be used on the disk.

In summary, current DVD Specifications as well as the above mentioned article and D1, do not teach or suggest that multiple BCA  
15 areas may be included on a single disk, or that a BCA may be applied to a dual-sided disk, or that each layer or each side of a recording medium may have a unique BCA.

#### SUMMARY OF INVENTION

The present inventor recognizes that it is desirable to be  
20 able to provide multiple laser-encoded area on a single disk. In particular, it is desirable to provide a respective laser-encoded area having selectively distinctive information for each side and/or each layer of a recording medium such as a laser disk. This would greatly expand the capability of a program  
25 distributor to be able to uniquely identify the contents of a disk. This would allow, for example, a pay-per-view provider to be able to distribute different movies encoded on different layers and/or different sides of a disk, instead of being limited to having only one BCA for the whole entire disk, as specified in  
30 the current DVD Specifications. This would greatly reduce the cost of program distribution.

c

Another aspect of the present invention is the recognition by the present inventor that the laser cutting process employed to remove the aluminum reflective surface to form a BCA may cause potential defects if more than one BCAs are used on a disk and the different BCAs overlap each other. This potential problem is illustrated in Figs. 3A and 3B. Fig. 3A illustrates the process for removing a portion of reflective layer 1 for encoding individualizable information in a BCA. This is done, for example, by focusing a YGA laser on the reflective layer 1 of the disk, as shown in FIG. 3A. The portion of the reflective layer 1 is then melted and the melted aluminum is then pulled away by surface tension leaving a non-metal portion 301, as shown in Fig. 3A.

Fig. 2B illustrates that when there is a problem with the laser cutting process, some portion of the laser energy may be absorbed unintentionally by another overlapping metal layer, for example, layer 0 of the recording medium, appearing below layer 1. This may cause the data of the BCA contained in the overlapping layer 0 of the disk to be corrupted. A defect of this kind will render the associated user program on layer 0 of the disk useless.

Therefore, a recording medium according to the present invention is disclosed, having a first and a second side comprising:

respective program data on said first and said second sides of said medium; and

a first area on said first side and a second area on said second side of said medium, said areas having laser encoded data representing individualizable information relating to said respective program data.

In one aspect of the present invention, the first and the second area described above do not overlap each other.

In addition, an apparatus for encoding a first and a second selectively distinctive codes on a recording medium is disclosed, comprising:

6/1

means for encoding said first code in a first preselected position and in a first preselected layer on a first side of said recording medium;

5

005060 "TET 54460

means for turning said recording medium to a second side; and

means for encoding said second code in a second preselected position and in a second preselected layer on said second side of said recording medium.

### BRIEF DESCRIPTION OF DRAWINGS

Fig. 1A shows an exemplary structure of a dual-layer DVD disk.

Fig. 1B shows an exemplary structure of a dual-layer, dual-sided DVD disk.

Figs. 2A shows an illustration of a burst cutting or laser cutting area on a disk.

Fig. 3A shows how a portion of a metal layer is removed to form a burst cutting area.

Fig. 3B shows how damage may occur to another overlapping burst cutting area.

Figs. 4A and 4B show an exemplary disk which has an overlapping burst cutting area for each layer of the disk in accordance with the present invention.

Fig. 5 shows an exemplary disk which has a burst cutting area for each layer of a dual-sided, dual-layer disk, with each burst cutting area occupying a separate non-overlapping area of the disk, in accordance with the present invention.

Fig. 6 shows an exemplary disk which has a burst cutting area for each layer of the 4-layer disk, with each burst cutting area occupying a non-overlapping, concentric circle on the disk in accordance with the present invention.

Fig. 7 shows an exemplary disk which has a burst cutting area for each side of a two-sided disk, with each burst cutting area occupying different, non-overlapping area of the disk.

Fig. 8 shows an exemplary laser cutting apparatus capable of  
5 implementing the exemplary disks in accordance with the present invention.

Fig. 9 shows an exemplary control program for controlling the apparatus shown in Fig. 8 in accordance with the present invention.

10

#### DETAILED DESCRIPTION OF DRAWING

Fig. 4A shows an exemplary, double-sided, dual-layer disk  
401 which has a burst cutting area for each layer of the disk in  
accordance with the present invention. Each respective BCA  
area for each layer of the disk may, for example, occupy the  
15 same location as currently specified in the DVD Specifications  
(i.e., with inner circumference of 22.3 (+0/- .4) mm and outer  
circumference of 23.50 (+/- .05) mm, from the center of the  
center hole), as shown in Figs. 2A and 4A. The advantage of  
having the respective BCA for each layer at the same location as  
20 currently specified in the DVD Specifications is that no  
hardware modification is needed for the present DVD player to  
be able to read the individualized code encoded in the  
respective BCA area.

As shown in Fig. 4B, the BCA for layer 0 of side A of the  
25 disk 401 will be encoded in layer 0 of side A. The BCA for layer  
1 of side A will be encoded in layer 1 of side A of the disk 401.  
Similarly, BCA for layer 0 of side B will be encoded in layer 0 of  
side B of the disk 401, and BCA for layer 1 of side B will be  
encoded in layer 1 of side B of the disk 401. Fig. 4B also  
30 illustrates how a YGA laser may be positioned and focused (see,

for example, positions (402-405) to encode the individualized codes for each BCA for each layer of the disk 401. The YGA laser may be focused on layer 0 of disk 401 through layer 1 since layer 1 is semi-reflective as discussed above and shown in Fig. 1A.

As discussed above, the present inventor recognizes that it may be desirable to locate a respective BCA for each layer of a recording medium in a non-overlapping manner with respect to each other so that potential defects may be minimized. Fig. 5 shows one such exemplary configuration in accordance with the present invention.

Fig. 5 shows a double-sided, dual-layer disk which also has a BCA for each layer of the disk. Each respective BCA may be positioned, for example, as specified in the DVD Specifications (i.e., located with inner circumference of 22.3 (+0/- .4) mm and outer circumference of 23.50 (+/- .05) mm from the center of the center hole). However, in order for all four BCAs to be non-overlapping with respect to each other, each BCA is allocated to have approximately 1/4 circumference of the specified BCA area, as shown in Fig. 5. Of course, the allocation of one quadrant for each BCA of each layer is exemplary only. The allocation may be done dynamically, for example, depending on the amount of individualized information needed to be encoded for each layer of the disk and the actual number of BCA areas used. Again, the advantage of having the respective BCA fall within the same tolerance as currently specified in the DVD Specifications is that no hardware modification is needed for the present DVD player to be able to read the individualized codes encoded in the respective BCA area.

Another exemplary embodiment of a disk in accordance with the present invention is shown in Fig. 6. Again, the dual-sided, dual-layer disk shown in Fig. 6 has a BCA area for each layer of the disk. The BCA areas shown in Fig. 5 also have non-overlapping positions with respect to each other, thereby minimizing potential defects caused by the laser coding process. Each respective BCA for each layer of the disk in Fig. 6 occupies one of four successive concentric rings. The four concentric rings together form the area defined by the DVD Specifications for BCA (i.e., having inner circumference of 22.3 (+/- .4) mm and outer circumference of 23.50 (+/- .05) mm from the center of the center hole). Since each BCA is still within the tolerance specified by the DVD Specifications, even though it is thinner, the red laser normally deployed in the DVD player will have no problem reading the codes embedded in each BCA, therefore, requiring little if any change to the current DVD hardware.

Fig. 7 shows another exemplary embodiment of a disk employing a combination of the spatial separation arrangements shown in Figs. 5 and 6. As shown in Fig. 7, a BCA for side A may be located in layer 1 of side A of the disk 701 and occupies a position which has non-overlapping circumferences and/or non-overlapping radius with respect to that of the BCA for side B of the disk 701. BCA for side B of the disk may also be located in layer 1 of the side B of disk 701.

Fig. 8 is an exemplary BCA recording system 800 suitable for encoding individualizable information in multiple configurations as shown, for example, in Figs. 4-7. The system 800 utilizes a CW-Q switch type YAG laser source 801 with wavelength of 1.06 um. The laser source 801 applies a high energy pulse laser beam during a short period of time to

11

remove an aluminum layer of a disk 805. One pulse of the laser beam can produce one BCA stripe.

The system 800 also includes a line beam forming optical system to shape the laser source into a line beam. The line  
5 beam forming system comprising a beam expander 802, cylindrical lens 803, focus lens 804. The functions of these components are well known in the art.

The system also includes a turn table 807 for seating a disk 805 to be encoded. The turn table 807 is controlled by a  
10 precision motor 809 which is connected to a rotary signal processor 810. Rotary signal processor 810 receives control signals from the processor controller 811 and in turns sends signals to drive the motor 809.

The system 800 is under the control of the process  
15 controller 811. The process controller 811 monitors the overall operation of the system and generates appropriate signals to control the laser source 801, rotary signal processor 810, the line beam forming system comprising of elements 801 - 803, and pick up arm 806, according to an exemplary control  
20 program shown in Fig. 9.

Fig. 9 shows an exemplary control program which may be executed by the processor controller 811 for controlling various components of the system 800 to encode BCA data on a disk in accordance with the present invention.

25 As shown in Fig. 9, at step 901, the pick up arm 806, under the control of the controller 811, will first load a disk 805 onto the turn table 807. At step 903, a first individualizable code such as a serial number is selected by the process controller 811. At step 905, the disk is then encoded with this selected code in a preselected position  
30 and in a preselected layer on the disk 805. The controller 811 will



cause the beam forming system to focus the laser source 801 on the selected layer of disk incorporating the BCA. For example, the BCA may be located in layer 1 of a dual-layer disk, as specified in the DVD Specifications. As the BCA data is being written by the laser 801, the  
5 controller 811 generates the necessary signals to control the rotary signal processor 810 which then rotates motor 809 appropriately.

After finishing the encoding of the first BCA with the first code, the controller 811 will then instruct the pick up arm 806 to flip the disk over to the other side, at step 915. The controller 811 will then  
10 retrieve a second individualized code for use in the BCA for this side of the disk, at step 920. At step 925, controller 811 will then position the disk and/or the laser beam so that the second individualizable code will be cut in a preselected position on the this side of the disk. This preselected position may be overlapping as shown, for example,  
15 in Fig. 4, or non-overlapping as shown, for example, in Figs. 5-7, with respect to the BCA for the other side of the disk. Encoding of the BCA for this side of the disk in a non-overlapping manner may be accomplished by either moving the motor 809 so that the laser source 801 is hitting the disk at a different rotational angle in relation to the  
20 first BCA on the other side of the disk, as shown, for example, in Fig. 5; or moving the focus lens 804 to a different radius from the center of the disk as shown, for example, in Fig. 6. Therefore, either overlapping or non-overlapping BCAs may be etched on the same disk in accordance with the present invention.

25 Fig. 10 is an exemplary laser disk player 1000 which may be employed to play and process a dual-sided disk having a burst cutting area on each side of the disk, or a multi-layered disk having a burst cutting area on selective layer of the disk, in accordance with the present invention. The exemplary laser  
30 disk player 1000 consists of the following major components.

009090 " F E T 4 6 0

Disk Reader Mechanism 1110 consists of a motor 1111 which spins a disk 1112, a laser source 1113 which reads information from the disk 1112, and an arm/side changer 1114 for flipping a disk so that the other side of a dual-sided disk can be read. As discussed above, other possible ways of having a player being able to read the other side of a disk include mechanically moving the laser source 1113 to the other side of the disk or manually flipping the disk by a user. The laser source 1113 is typically a red light laser diode with wavelength at 635 or 650 nm.

The DVD-DSP (Digital Signal Processor) 1120 is a circuit that translates laser reflections from a disk being read into electrical form so that other parts of the player 1000 can process the electrical information. The DVD-DSP 1120 also contains the necessary circuitries to monitor and control the subelements of the Disk Reader Mechanism 1110, including controlling the laser 1113, and the motor 1111, etc.

The electrical information from the DVD-DSP 1120 is transmitted to a Digital Audio/Video Decoder section 1130. The Digital Audio/Video Decoder 1130 is a circuit which reconstruct the compressed data on the disk and converting them into studio-quality video and CD-quality audio for output to TVs and stereo systems.

In more detail, the Decoder 1130 consists of a Demultiplexer 1131 for demultiplexing the compressed data from the disk into three different data streams. A first data stream is a demuxed MPEG video stream which is transmitted to a MPEG Video Decoder 1132. A second data stream, a demuxed audio data stream, is fed into an appropriate type of audio decoder 1133 (such as a Dolby AC3 or an MPEG audio

decoder). The third data stream is a demuxed subpicture data stream which is fed into the Subpicture Processing circuit 1134 and OSD Generator circuit 1135 for processing subpictures such as subtitles, captions, menus, etc., and for generating OSD and user menuing information.

The decoded and processed MPEG video and subpicture/OSD video data streams are then muxed together by Multiplexer 1136. The combined video information is transmitted to an NTSC/PAL encoder 1140 so that the digital video information is converted into NTSC or PAL compatible analog format for displaying on an analog NTSC or PAL television (not shown).

A Microcontroller 1150 is provided to control the operation of the player 1000, including translating user inputs from a remote control (not shown) or a front panel (not shown) into commands for the various elements of the disk player 1000. The Microcontroller 1150 is also responsible for implementing functions such as controlling parental lockout, reading data from a respective laser-encoded area, and dialing a program provider for validating access codes, etc.

Communication Control 1160 is responsive to the Microcontroller 1150 for communicating information to/from a program provider, for example, for transmitting a serial number read from a BCA to a program provider for validation or billing purposes. The Communication Control 1160 typically includes a modem for communicating to the service provider through the telephone network 1170 via direct dialing or through an internet ISP provider.

Fig. 11 shows an exemplary subroutine for reading codes from a respective laser encoded area. This subroutine may be executed by

the microcontroller 1150 of the exemplary laser disk player 1000 to identify and process different BCAs located on the same disk in accordance with the present invention. At step 1910, the lead-in area of a disk in the player 1000 is read by laser source 1113 and the information contained in the lead-in area is then processed by microcontroller 1150. The lead-in area of a disk includes data regarding the physical configuration of the disk. The information in the lead-in area currently include data about the number of layers on a disk, the disk size, and whether the disk contains a BCA, etc. If the player 1000 determines that this disk contains more than one layer of tracks, the player may assume that this disk contains more than one BCAs (e.g., one for each layer), as shown at steps 1920 and 1940. In addition, another exemplary embodiment may be that data in the lead-in area of the disk may specifically indicate the number of BCAs on the disk being processed, so that a player in response to this information will look for more than one BCAs at predefined locations.

If this lead-in area indicates that there is only one BCA on this disk either directly or indirectly, as shown at step 1930, the DVD player 1000 will then proceed to read this BCA as defined, for example, in the current DVD Specifications. Once this BCA is read, the player 1000 will end this subroutine for reading the BCA code, at step 1995.

If the player 1000 determines that more than one BCAs are on this disk, it will first identify the number of BCAs on the disk. The player 1000 will then locate a first predefined BCA code and read the code contained in the first BCA, as shown at step 1950. For example, if the disk is in a format shown in Fig. 5, the DVD will first focus the laser source 1113 on layer 1 to read BCA data on layer 1. The DVD player 1000 will then store this BCA in memory as well as an indication of which program this BCA code is associated with (e.g., an

16

indication that this first BCA code is for the first layer of side A of the disk), as shown at step 1960. The DVD player will then attempt to locate a subsequent BCA and read code from the subsequent BCA, at step 1970. For example, the DVD player 1000 will then cause the  
5 laser source 1113 to focus the laser on layer 0 of side A of the disk. It will then store this subsequent BCA code for the program in layer 0 of side A of the disk, at step 1980. The player will then repeat the process until all the BCAs on the disk are processed and read, as shown at step 1990, including turning the disk over to read BCA data  
10 from the other side of the disk.

It is to be understood that the embodiments and variations shown and described herein are for illustration only and that various modifications may be implemented by those skilled in the art without departing from the scope and spirit of the invention.

15

009000 "TET 54460

## CLAIMS

1. A recording medium having a first and a second side comprising:

5                    respective program data on said first and said second  
sides of said medium; and

a first area on said first side and a second area on said second side of said medium, said areas having laser encoded data representing information identifying said respective program data.

10

2. The medium of claim 1 wherein said first area and said second area occupy non-overlapping positions with respect to each other.

15           3. The medium of claim 2 wherein said first area has  
substantially the same inner and outer circumferences but a different  
angular position from said second area.

4. The medium of claim 2 wherein said first and second areas  
20 are positioned as concentric rings with respect to each other.

5. The medium of claim 1 wherein said medium is a DVD disk.

25                   6.   A recording medium comprising:  
                      a first and a second layers, each of said layers containing  
                      respective program data;

a first area on said first layer and a second area on said second layer, said areas having laser encoded data representing individualizable information.

30

7. The medium of claim 6 wherein said first area and said second area occupy non-overlapping positions with respect to each other.

5           8. The medium of claim 6 wherein said first area has substantially the same inner and outer circumferences but a different angular position from said second area.

9. The medium of claim 6 wherein said first and second areas  
10 are positioned as concentric rings with respect to each other.

10. The medium of claim 6 wherein said medium is a DVD disk.

11. The medium of claim 6 wherein said first and second layers  
15 are on the same side of said medium.

12. The medium of claim 10 wherein said first and second areas are Burst Cutting Areas of said DVD disk.

20           13. The medium of claim 5 wherein said first and second areas are Burst Cutting Areas of said DVD disk.

14. A DVD disk, comprising:

25           A first layer for storing a first program;  
          a second layer for storing a second program;  
          an area of said first layer for having laser encoded data for identifying said first program; and  
          an area of said second layer for having laser encoded data for identifying said second program.

15. An apparatus for laser encoding a first and a second selectively distinctive codes on a recording medium, comprising:

means for encoding said first code in a first preselected position and in a first preselected layer on said recording medium;

5 and

means for encoding said second code in a second preselected position and in a second preselected layer of said recording medium.

10 16. The apparatus of claim 15, wherein said first layer and second layer are on opposite sides of said recording medium.

15 17. The apparatus of claim 16 wherein said apparatus further comprises means for turning said recording medium from one side to the other.

18. The apparatus of claim 15, wherein said first position does not overlap said second position.

20 19. A method for processing a disk having more than one laser encoded data for identifying more than one programs on said disk, comprising:

identifying a count representing the number of laser encoded areas on said disk;

25 obtaining a first laser encoded data by reading from a first laser encoded area on said disk; and

obtaining a subsequent laser encoded data by reading from a subsequent laser encoded area on said disk until the number of laser encoded areas read equals to said count.



20. The method of claim 19, wherein said laser encoding areas are Burst Cutting Areas for a DVD disk.

21. An optical disk having a first recording area where first main data are recorded in the form of pits, and a second recording area which is a predetermined area in the first recording area, where a plurality of a reflection film are removed partially, so a first identification data is recorded for associating with the first main data, the optical disk being characterized by:

a third recording area for recording second main data; and

a forth recording area where a plurality of reflection film are removed partially, so a second identification data is recorded for associating with the second main data.

22. A method for processing a disk, comprising the steps of obtaining, from the disk, a first code encoded individually on a first area of the disk; and using the first code obtained to process first main data associated with the first code, the method further characterized by:

obtaining, from the disk, a second code encoded individually on a second area of the disk; and

using the second code obtained to process second data associated with the second code.

23. A method for forming a disk, comprising the steps of encoding first main data on a first area of the disk; and encoding, individually, a first code on a second area of the disk for identifying the first main data, the method further characterized by:

encoding second main data on a third area of the disk; and

encoding, individually, a second code on a forth area of the disk for

5 identifying the second main data.

Variable	Mean	SD	Min	Max
Age	34.5	10.2	21	55
Gender	0.5	0.5	0	1
Marital status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	15.2	5.8	5	35
Occupation	1.2	0.8	0	2
Health status	1.8	0.9	1	3
Stress level	2.5	1.2	1	4
Life satisfaction	3.2	1.5	1	5
Resilience	2.8	1.1	1	4
Optimism	3.5	1.3	1	5
Self-efficacy	3.8	1.4	1	5
Emotional stability	3.1	1.2	1	5
Prosocial behavior	3.4	1.3	1	5
Empathy	3.6	1.4	1	5
Altruism	3.3	1.3	1	5
Compassion	3.7	1.4	1	5
Kindness	3.9	1.5	1	5
Generosity	3.5	1.4	1	5
Helpfulness	3.6	1.4	1	5
Cooperativeness	3.7	1.4	1	5
Teamwork	3.8	1.4	1	5
Leadership	3.9	1.5	1	5
Communication	4.0	1.5	1	5
Conflict resolution	4.1	1.5	1	5
Problem solving	4.2	1.5	1	5
Decision making	4.3	1.5	1	5
Goal setting	4.4	1.5	1	5
Time management	4.5	1.5	1	5
Organization	4.6	1.5	1	5
Productivity	4.7	1.5	1	5
Efficiency	4.8	1.5	1	5
Quality of work	4.9	1.5	1	5
Job satisfaction	5.0	1.5	1	5
Commitment	5.1	1.5	1	5
Engagement	5.2	1.5	1	5
Motivation	5.3	1.5	1	5
Energy	5.4	1.5	1	5
Enthusiasm	5.5	1.5	1	5
Positivity	5.6	1.5	1	5
Optimism	5.7	1.5	1	5
Hope	5.8	1.5	1	5
Confidence	5.9	1.5	1	5
Trust	6.0	1.5	1	5
Respect	6.1	1.5	1	5
Kindness	6.2	1.5	1	5
Generosity	6.3	1.5	1	5
Helpfulness	6.4	1.5	1	5
Cooperativeness	6.5	1.5	1	5
Teamwork	6.6	1.5	1	5
Leadership	6.7	1.5	1	5
Communication	6.8	1.5	1	5
Conflict resolution	6.9	1.5	1	5
Problem solving	7.0	1.5	1	5
Decision making	7.1	1.5	1	5
Goal setting	7.2	1.5	1	5
Time management	7.3	1.5	1	5
Organization	7.4	1.5	1	5
Productivity	7.5	1.5	1	5
Efficiency	7.6	1.5	1	5
Quality of work	7.7	1.5	1	5
Job satisfaction	7.8	1.5	1	5
Commitment	7.9	1.5	1	5
Engagement	8.0	1.5	1	5
Motivation	8.1	1.5	1	5
Energy	8.2	1.5	1	5
Enthusiasm	8.3	1.5	1	5
Positivity	8.4	1.5	1	5
Optimism	8.5	1.5	1	5
Hope	8.6	1.5	1	5
Confidence	8.7	1.5	1	5
Trust	8.8	1.5	1	5
Respect	8.9	1.5	1	5
Kindness	9.0	1.5	1	5
Generosity	9.1	1.5	1	5
Helpfulness	9.2	1.5	1	5
Cooperativeness	9.3	1.5	1	5
Teamwork	9.4	1.5	1	5
Leadership	9.5	1.5	1	5
Communication	9.6	1.5	1	5
Conflict resolution	9.7	1.5	1	5
Problem solving	9.8	1.5	1	5
Decision making	9.9	1.5	1	5
Goal setting	10.0	1.5	1	5

22  
ABSTRACT

A system and method of identifying programs contained on a disk of any format, including, for example, either a single-sided or a double-sided disk with either a single-layer or multi-layer tracks, are presented. In particular, a dual-sided recording medium is disclosed having respective program data on the first and the second sides of said medium. In addition, the medium has a first area on the first side and a second area on the second side, and the areas have laser encoded data representing individualizable information relating to said respective program data. The areas may or may not overlap each other depending on the configuration chosen. Also disclosed is an apparatus for laser encoding the above-described recording medium, and a method for processing a disk having more than one laser encoded areas.

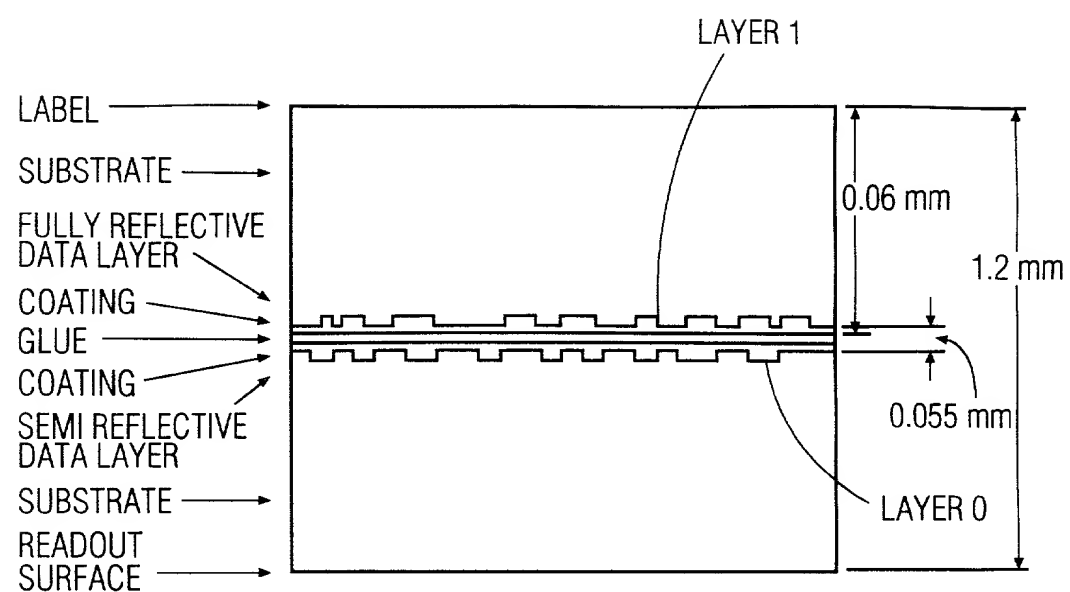


FIG. 1A

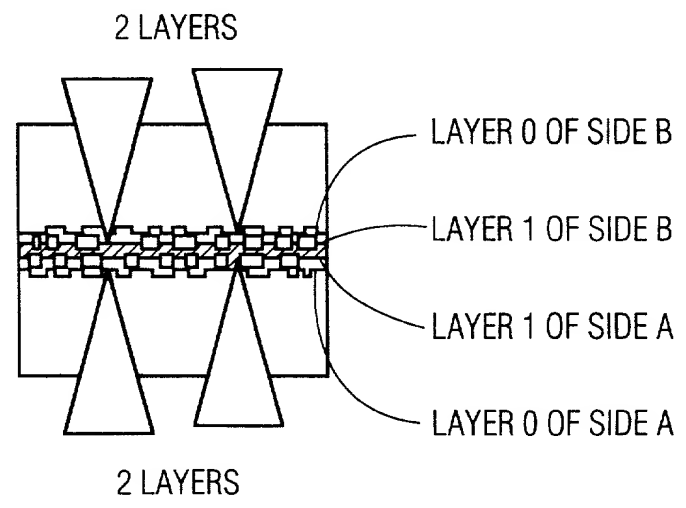


FIG. 1B

009060 " 16.54450

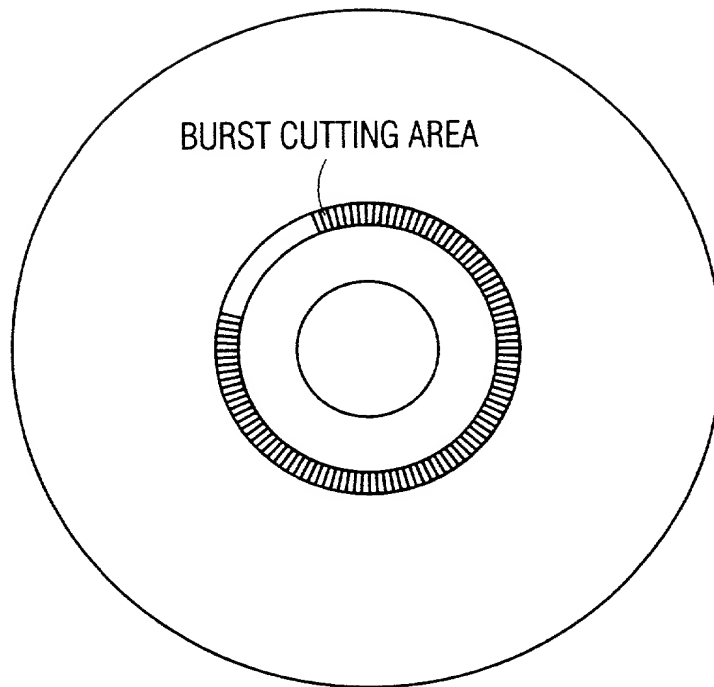


FIG. 2



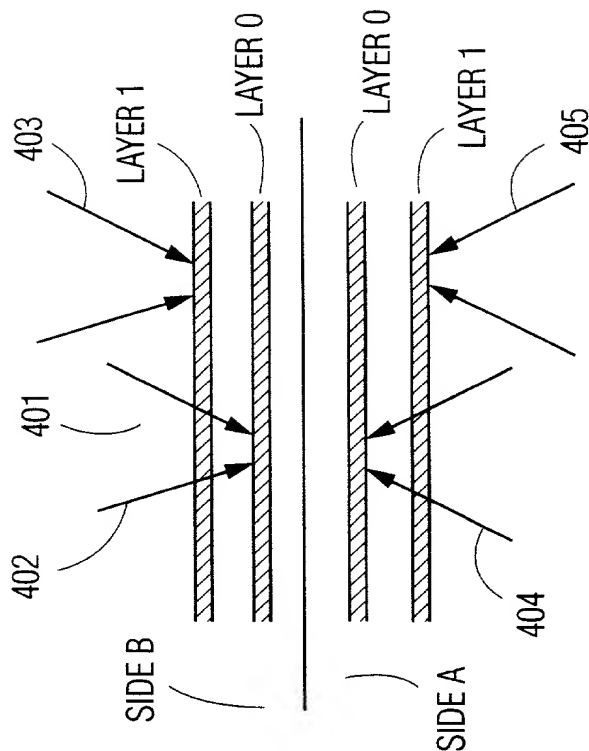
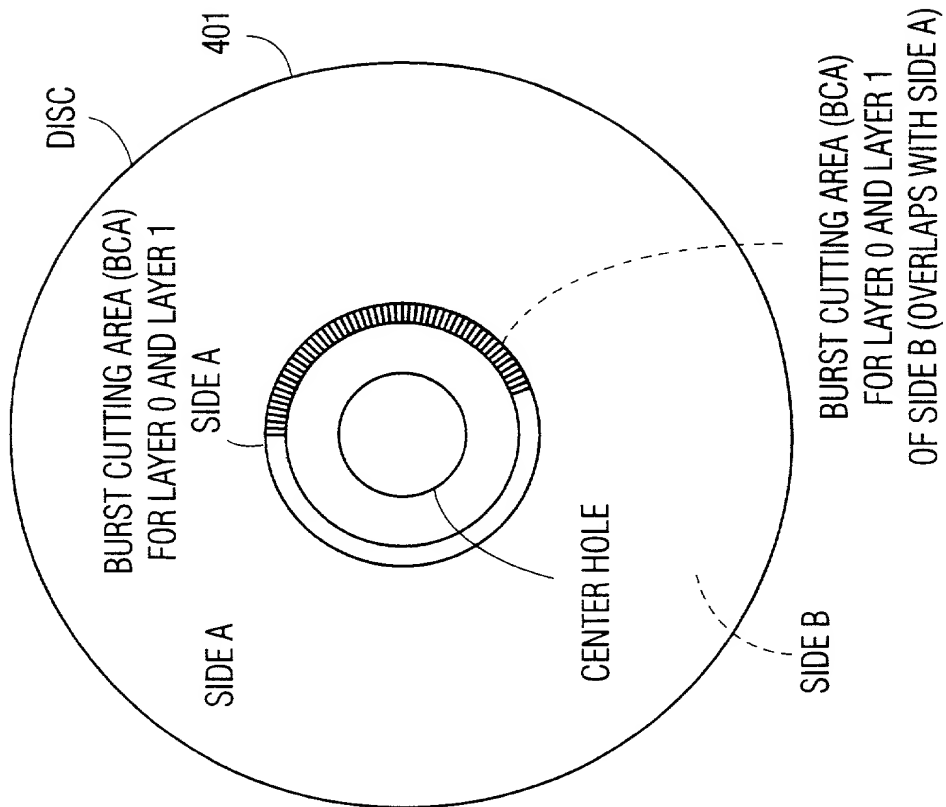


FIG. 4B

FIG. 4A

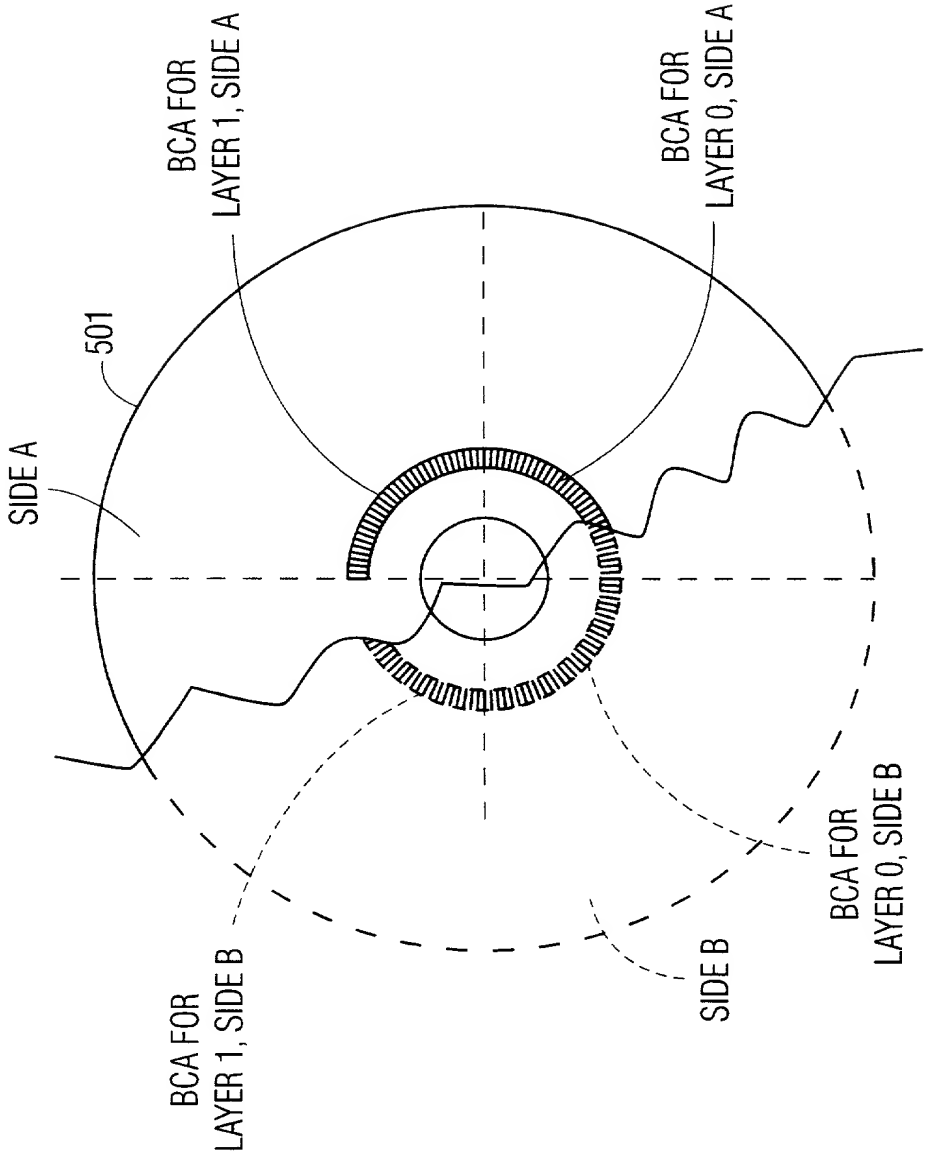


FIG. 5





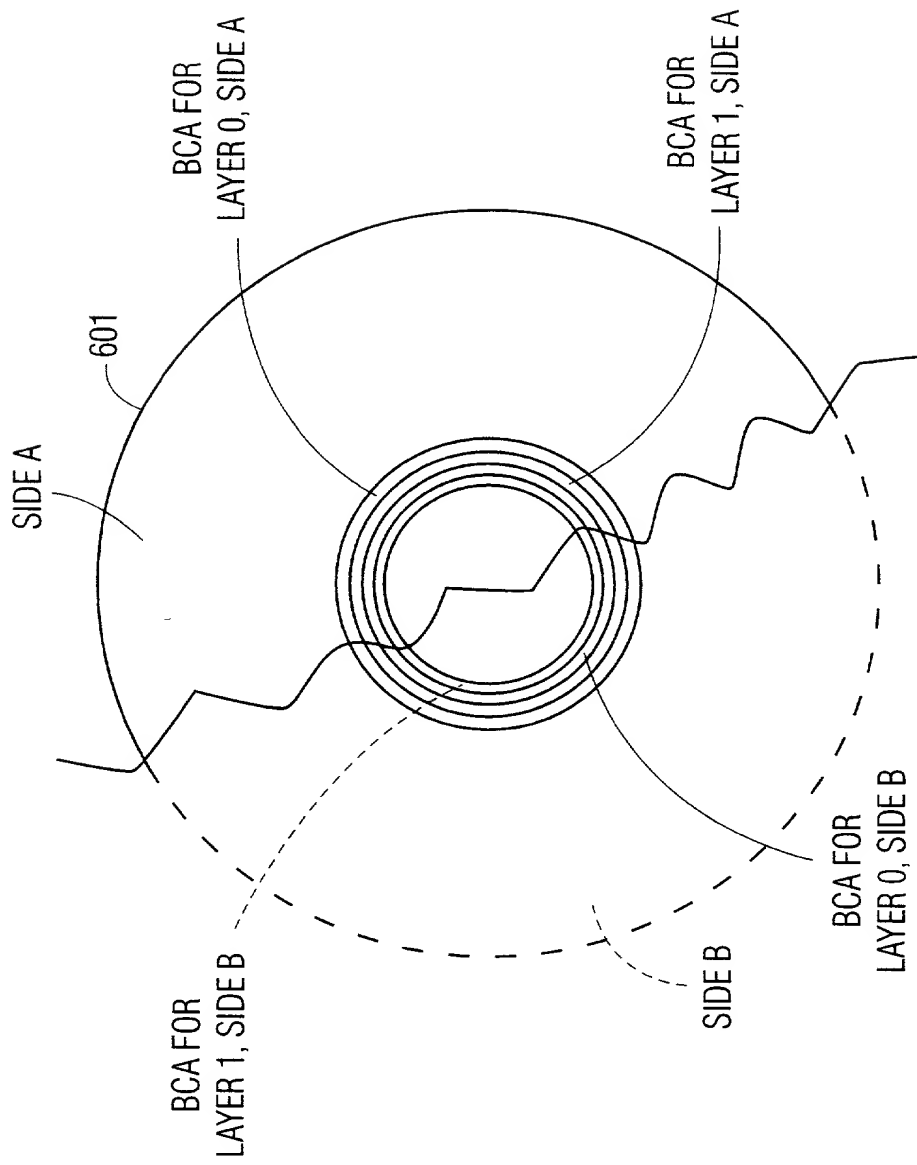


FIG. 6



**FIG. 7**

FIG. 8

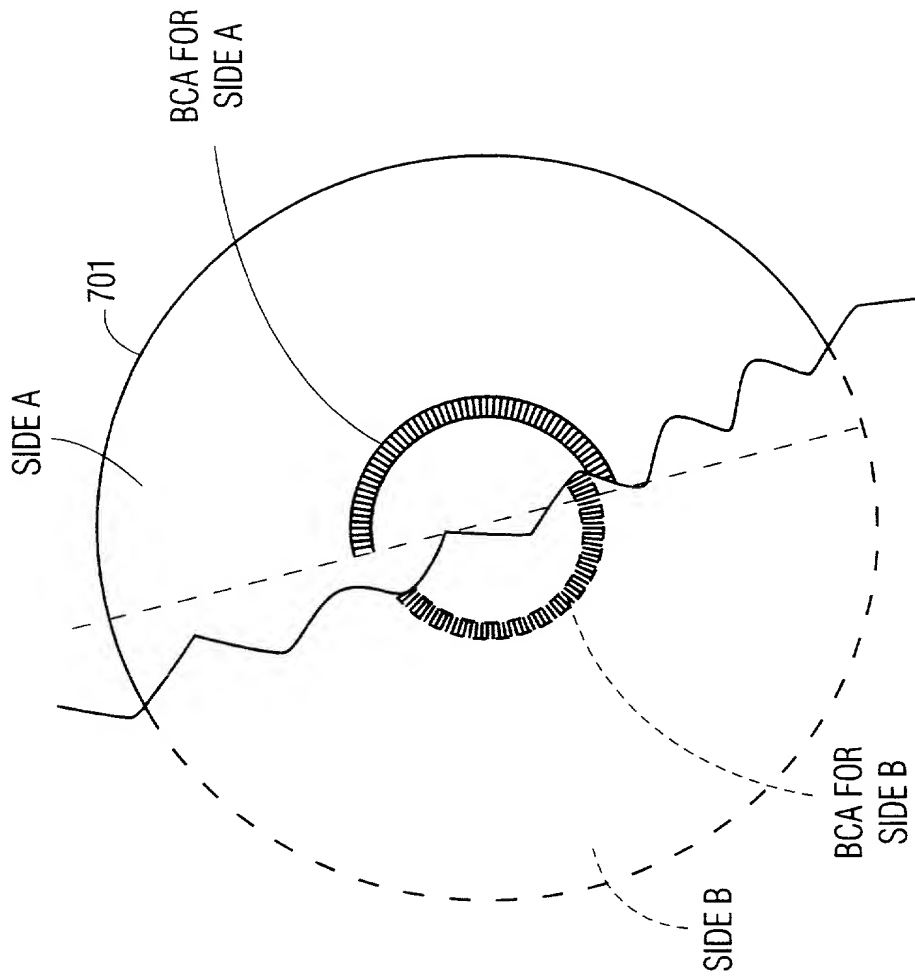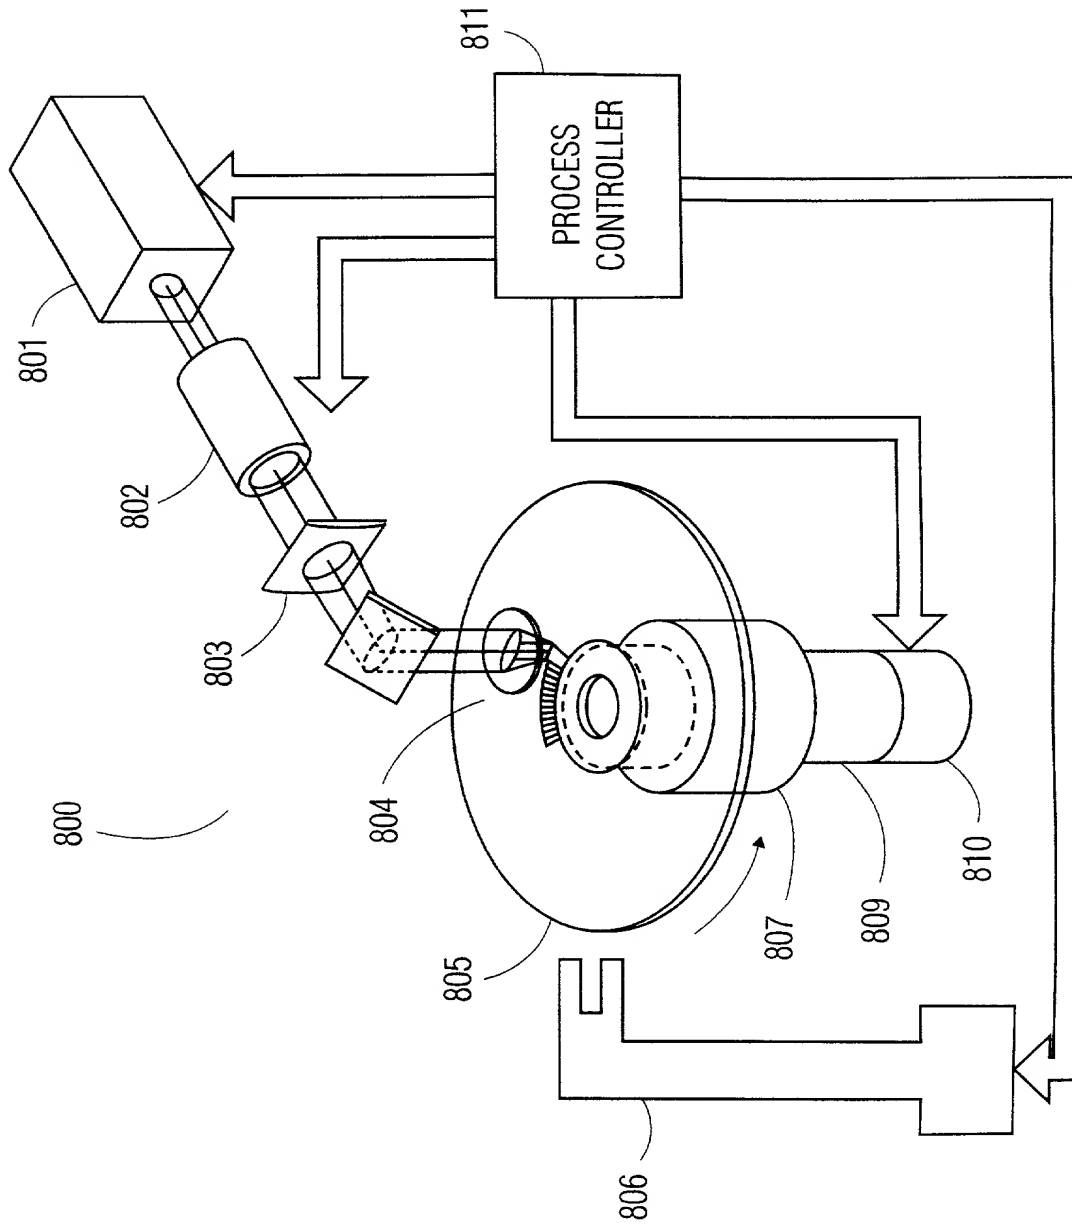

9/11

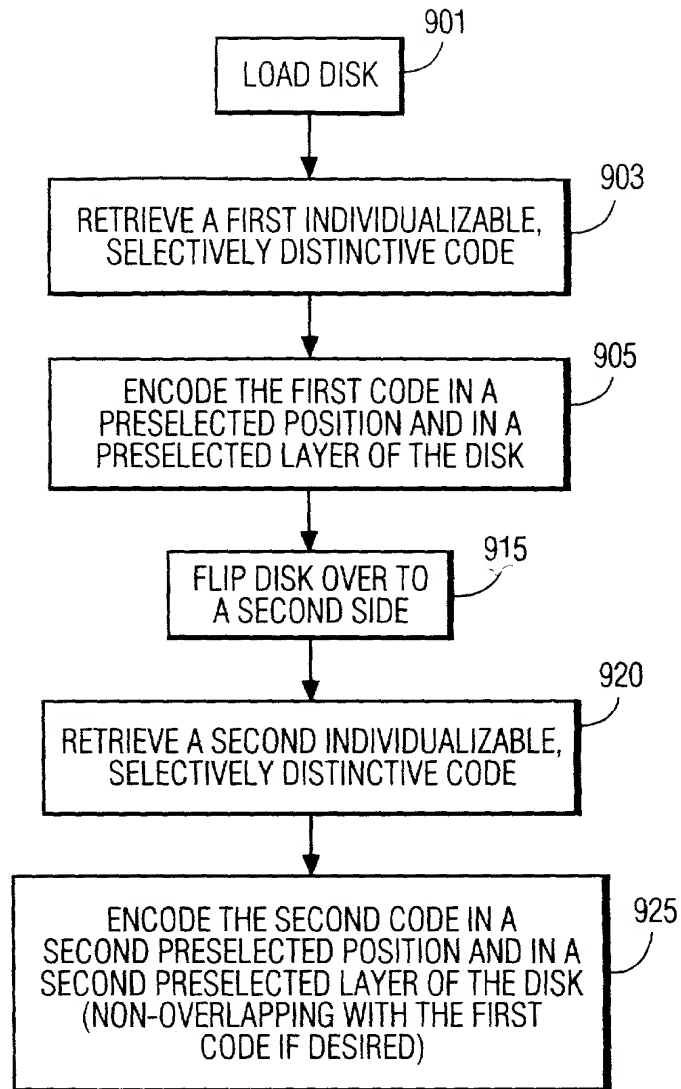


FIG. 9

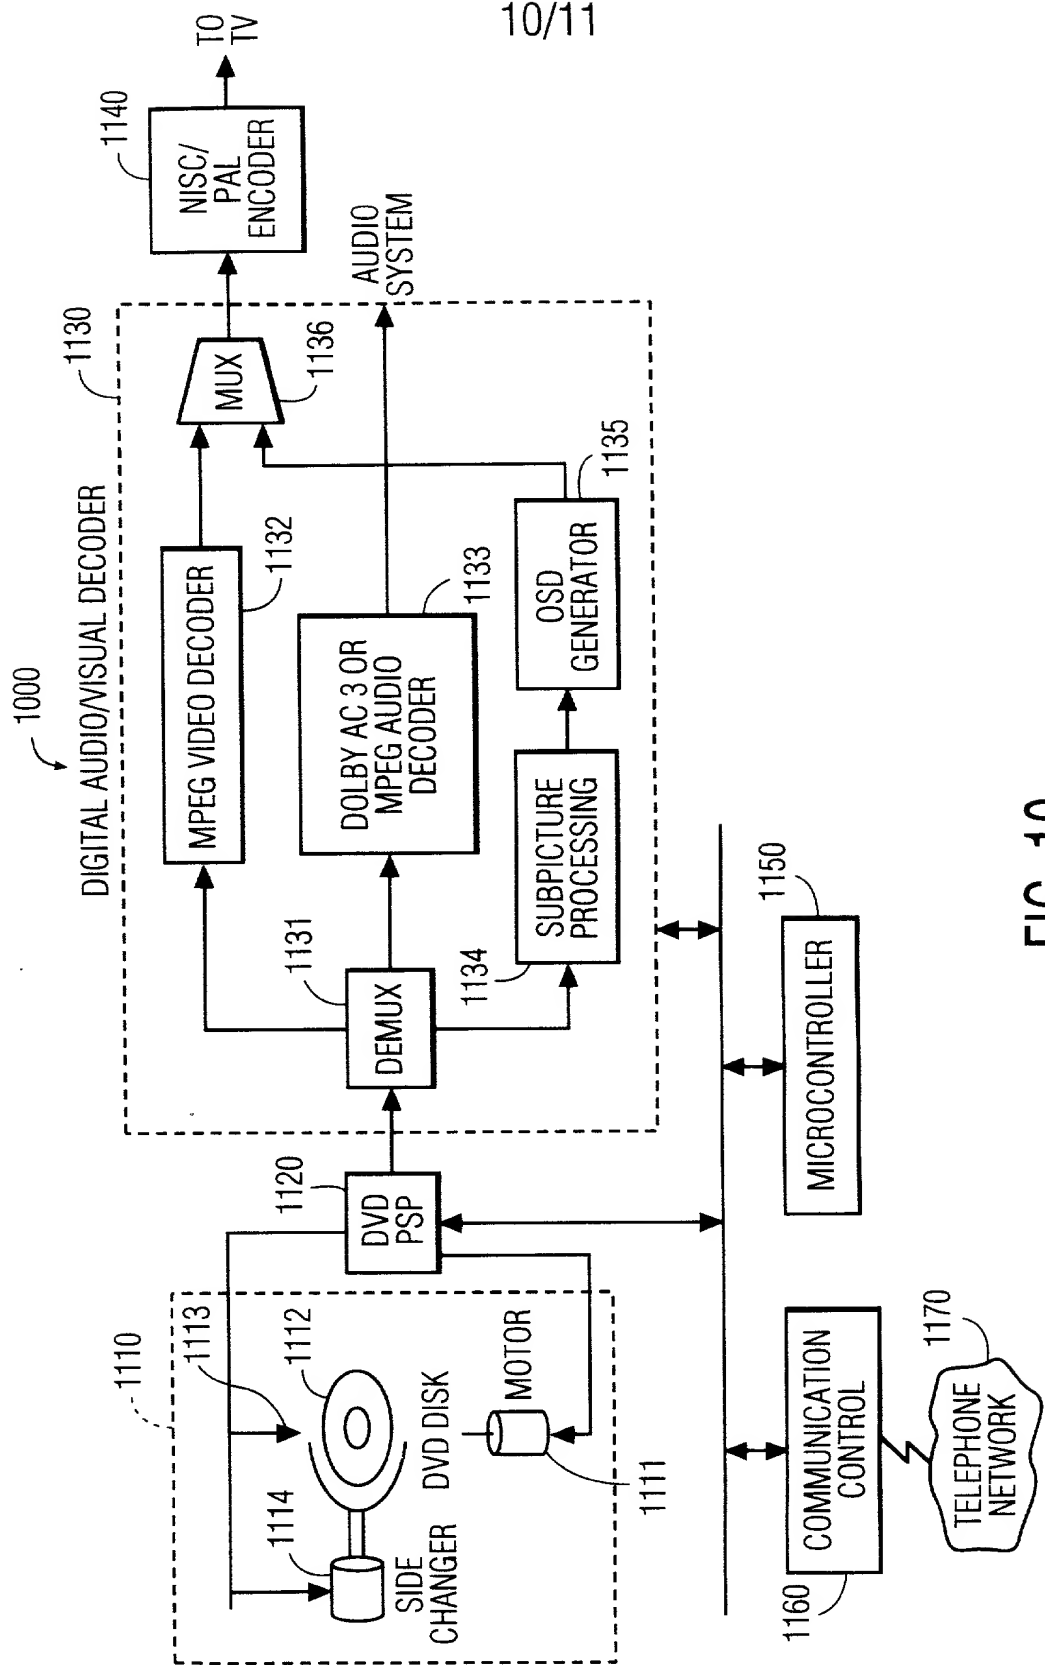


FIG. 10

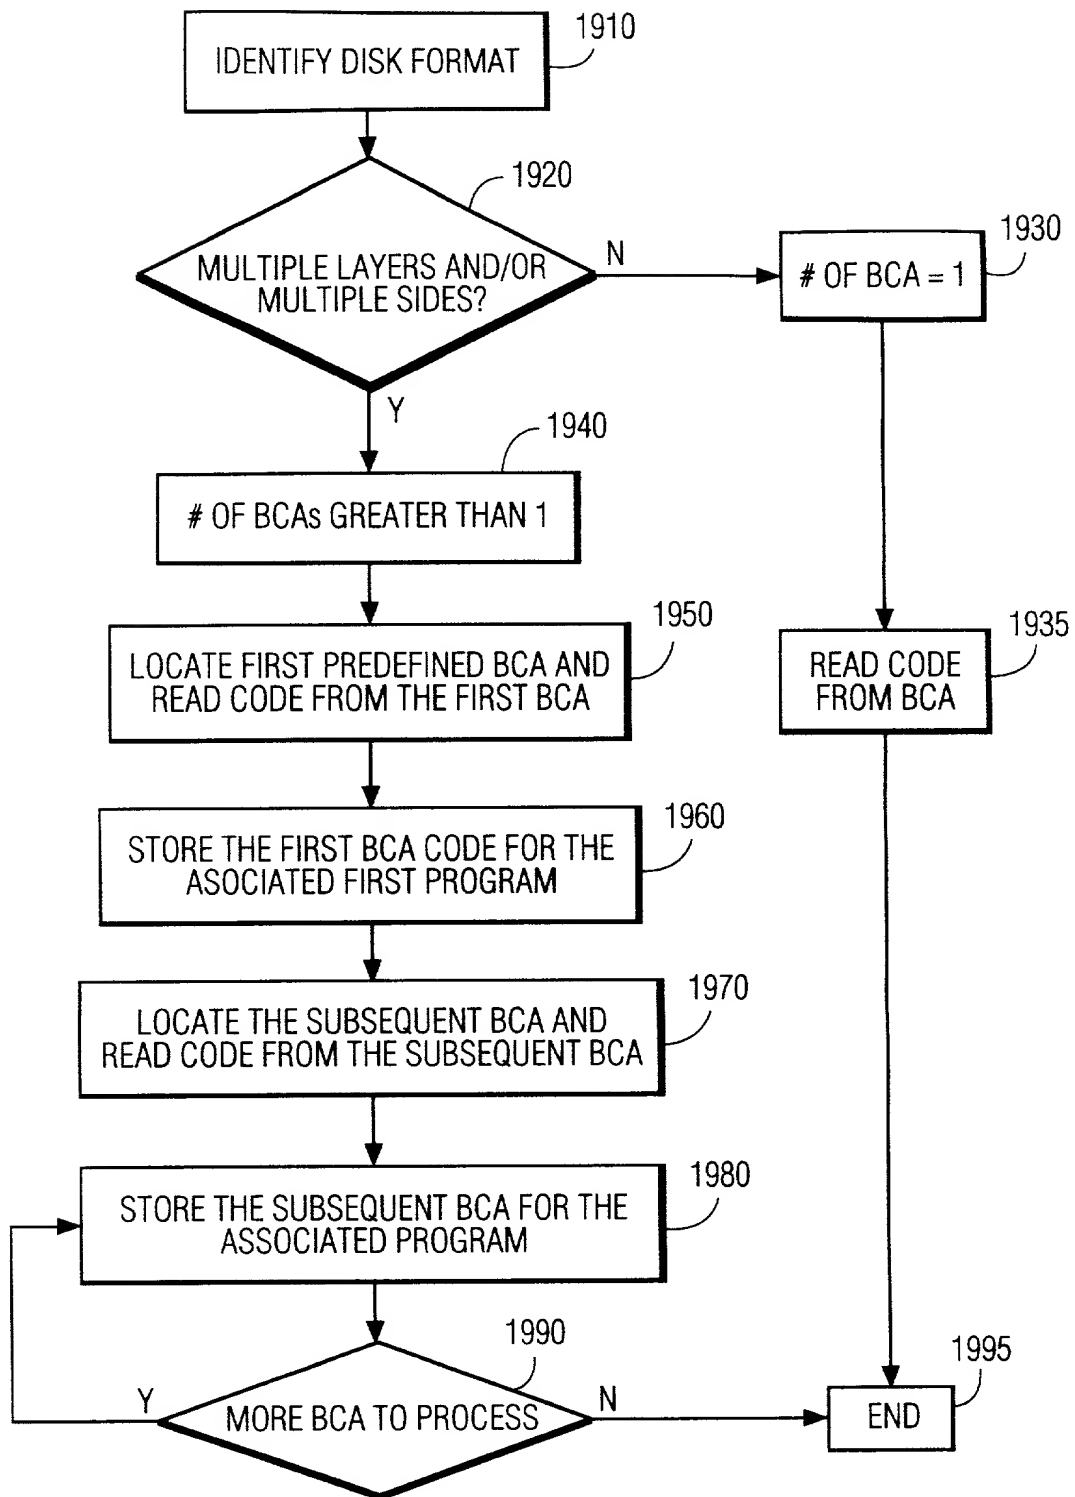


FIG. 11